NOTES:
1.ALL TRACER WIRE SHALL BE UV-STABILIZED 10 GAUGE. DIRECTIONAL BORES REQUIRE TO HAVE TWO 10 GAUGE WIRES THAT ARE PULLED WITH DIRECTIONAL DRILL. OPEN CUT MAY USE ONLY ONE 10 GAUGE WIRE. WIRE LENGTH MUST HAVE ENOUGH SLACK TO BE EXTENDED A MINIMUM OF 18" ABOVE GRADE FOR USE.

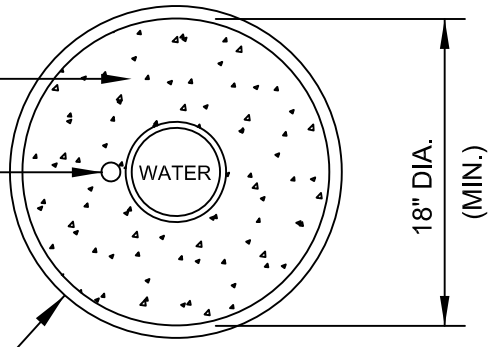

CONCRETE FLUSH WITH ADS PIPE WITH SMOOTH FINISH

3" DIA. X 18" LONG PVC PIPE FOR TRACER WIRE W/ CLEAN-OUT CAP WITH BRASS COUNTER-SUNK PLUG

18" DIA. X 12" THICK CONC. COLLAR AROUND VALVE BOX IS TO BE POURED IN PLACE, USING A 18"DIA. X 12" DEEP "ADS" (HDPE PIPE) AS A FORM & IS TO REMAIN AFTER WORK IS COMPLETED. (3,000 P.S.I. CONC.) (UNPAVED AREAS ONLY)

Plan

WORD "WATER", "SEWER" OR "RECLAIMED", AS APPLICABLE ON ROUND COVER. (PAINTED BLUE, GREEN, OR PURPLE RESPECTIVELY)

"ADS" (HDPE PIPE) TO BE CUT BETWEEN THE RIBS.

FIN. GRADE

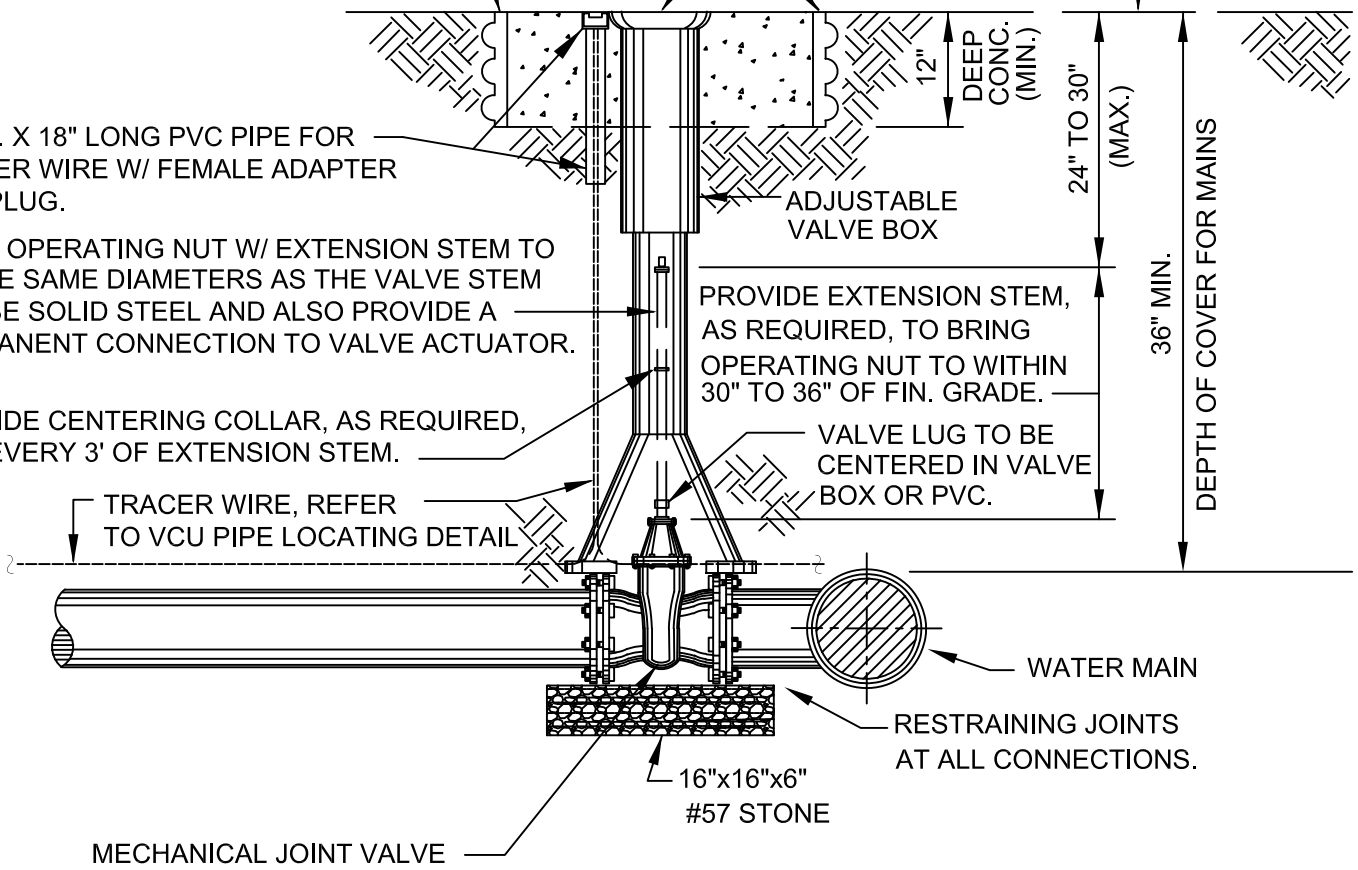

Cross-Section

VALVE AND BOX DETAIL